



TWISTER 135 WOOD/GAS

SERIES: PAVESI ROTATING OVENS



Standard Pavesi
Twister 135
Wood/Gas

JOB NAME: _____

REFERENCE INVOICE #: _____

CUSTOM FACADE: YES NO

CUSTOM FACADE DOCUMENT #: _____

BURNER POSITION: L R

EXTENDED OVEN OPENING: 32"

• Pavesi Twister 135 Wood/Gas is constructed in a place by a certified Forza Forni Technician.

REFRACTORY MONOBLOCK FLOOR

The Pavesi Twister features the world's only refractory commercial brick oven floor in one solid block.

VERSATILE & RELIABLE

The Pavesi Twister design excels at holding a wide variety of temperatures to achieve almost any pizza size and style.

TRADITION & TECHNOLOGY





The Pavesi Twister is designed to preserve traditional Italian hearth oven dynamics with the ease and consistency of a rotating floor.



Approved by
the Association
of Neapolitan
Pizzaiuoli of
America

FEATURES

The Pavesi Twister 135 Wood/Gas is a hand-built Italian hearth-style brick oven which features a rotating refractory oven floor. The solid, single piece refractory floor diameter is 54", with a front-facing stainless steel arch opening which allows access to the hearth at 23" wide by 11" tall. The hearth opening can be extended by special order. Wood fuel is combusted within the oven hearth, to the side of the rotating floor. A steel ash catch allows wood to burn and drop into a fire-proof container placed on the floor underneath the oven. A powerful twin flame gas burner is positioned behind the wood-fired oven grate to preserve the wood fired ambience and disguise the gas flame. The internal refractory dome and single piece floor are sealed with a refractory cement and over-insulated with high quality asbestos-free ceramic blankets to ensure maximum heat retention. The oven structure is formed by a wrapped steel sheet painted "Rosso Corso" red, and sits on top of four circular dark grey steel legs. Custom facade options can be found online at www.forzaforni.com.

BAKING SURFACE	OVEN OPENING	EXTERNAL WIDTH	EXTERNAL DEPTH
			

GAS REQUIREMENTS

This equipment may be used with LP gas or natural gas.

CONNECTION SIZE:	3/4" Male threaded			
	LP GAS		NATURAL GAS	
GAS PRESSURE:	11-14 in H ₂ O		5.5 - 14 in H ₂ O	
	●	○	●	○
ORIFICE SIZE:	#30		#5	
HOURLY BTU INPUT RATING:	28,000 Btu/Hr	140,000 Btu/Hr	28,000 Btu/Hr	140,000 Btu/Hr

● MINIMUM BTU ○ MAXIMUM BTU (Burner uses an automatic modulation control system that adjusts BTU according to need.)

OVEN PRODUCTION

	12"	16"
PIZZA CAPACITY	10-12 PIZZAS	6-7 PIZZAS
RECOMMENDED BAKING TIME:	1.5-3 MINUTES	3-5 MINUTES
OVEN TEMP RANGE:	700-900 °F	500-700 °F
DAILY PREHEAT TIME:	60 MINUTES	

ROTATION MOTOR CONTROL PANEL



FORZA FORNI
601 N Main St, Brewster, NY 10509
Email: info@forzaforni.com
www.forzaforni.com

844-OVEN-INC (844-683-6462)
Toll-free in USA
(Hablamos Español,
Falamos Português)

Oven Listed to: UL 2162-ULC/ORD C2162,
ANSI Z83.11-CSA 1.8, & NSF-4 for
Commercial Wood Fired and
Gas Fired Cooking Equipment



DOC#: TW135WG-1218-1

REVISED FALL 2018. As products continue to improve, spec sheets may change without notice. Please call Forza Forni for the latest specification sheet and for further details.

MADE IN ITALY



TWISTER 135 WOOD/GAS


SERIES: PAVESI ROTATING OVENS

DETAILED SPECS


WEIGHT:
3,150 LB

We make every effort to provide accurate information regarding manufacturer's reported dimension information. Please note that due to the artisan nature of the manufacturing process, from time to time, product sizing and ship weight may vary slightly.

FRONT ELEVATION

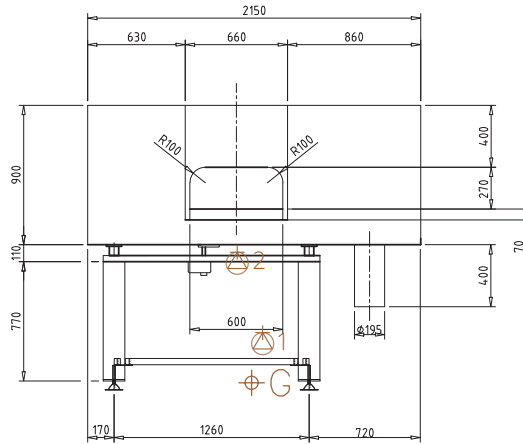


PLAN VIEW

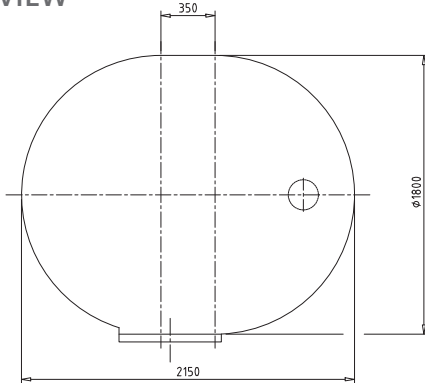

LEFT ELEVATION

Pictured: Right Gas Disposition

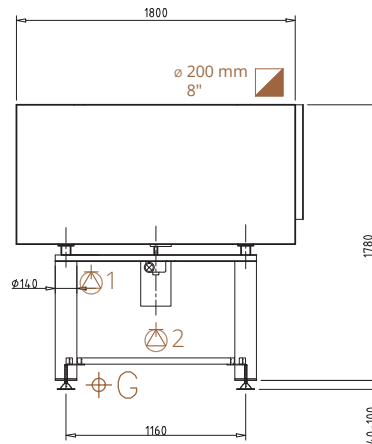

KEY

1 Gas Burner
Electrical Connection

2 Rotation Motor
Electrical Connection

G Gas Connection

Flue Collar
Exhaust Connection

All measurements listed in millimeters

CLEARANCES

Minimum clearance of the oven (built-in or standalone) to combustible materials are as follows:

Top: 14" (356 mm)

Back & Sides: 1" (25 mm)

- Non-combustible flooring must extend out at least 36" (914 mm) from oven opening and at least 30" (762 mm) to each side of the opening.
- Do not fill required air space with insulation or other materials.

ELECTRICAL REQUIREMENTS

Gas Burner
■ 120 VAC,
0.5 A, 60 Hz


Rotation Motor
■ 120 VAC,
7 A, 60 Hz

VENTILATION REQUIREMENTS

Direct connection as a natural draft, grease-rated chimney system per NFPA 96 and UL 2162 is recommended. If the duct run exceeds 20 feet or incorporates a 90° elbow, a UL 705 & UL 762 listed rooftop exhaust fan shall be installed to ensure adequate pressure within the duct. A Listed Type 1 exhaust hood, or one constructed in accordance with

all relevant local and national codes (NFPA 96), may also be installed above the oven in instances where a natural/power draft chimney system is otherwise impossible. See "Ventilation Document - Pavesi" for details.

Operational airflow: 150-200 CFM
Static Pressure at Flue Collar: 0.05 in H₂O



FLUE COLLAR
CONNECTION
DIAMETER
(EXTERNAL)

WARRANTY INFORMATION

10 year limited warranty on internal refractory parts, 1 year limited warranty on electrical, gas and other components. See warranty document for details.

FORZA FORNI
601 N Main St, Brewster, NY 10509
Email: info@forzaforni.com
www.forzaforni.com

844-OVEN-INC (844-683-6462)
Toll-free in USA
(Hablamos Español,
Falamos Português)

Oven Listed to: UL 2162-ULC/ORD C2162,
ANSI Z83.11-CSA 1.8, & NSF-4 for
Commercial Wood Fired and
Gas Fired Cooking Equipment



DOC#: TW135WG-0118-1

REVISED WINTER 2018. As products continue to improve, spec sheets may change without notice. Please call Forza Forni for the latest specification sheet and for further details.

MADE IN ITALY